

OPS-3636-RS RRF TRANSFER SHOWER

ADA COMPLIANT

SUBMITTAL SHEET

ADA STANDARDS FOR ACCESSIBLE DESIGN FHA. CSA B45.5-11 / IAPMO Z124-2011. HUD UM 73a. ASTM F-462

TO COMPLETE YOUR ORDER, THIS DOCUMENT MUST BE SIGNED AND FAXED TO AKER ORDER DESK FAX: (304) 263-8369 • PHONE: 1-800-962-2537

DATE:		JOB NAME:	
CUSTOMER:		QUOTE#:	
SHIP TO:			
P.O. #:		PHONE:	
QUANTITY:		SPECIAL NOTES:	
	/ /		/ /
PLUMBING CONTRACTOR APPROVAL	DATE	GENERAL CONTRACTOR APPROVAL	DATE
	/ /		/ /
ENGINEER APPROVAL	DATE	ARCHITECT APPROVAL	DATE

IMPORTANT NOTES:

- 1. MAAX assumes no responsibility for final code compliance. Information and specifications taken from this document must be confirmed with appropriate
- 2. Units are code compliant when fully equipped and installed according to guidelines.
- 3. Due to possible water leaks between the threshold of the shower and the curtain, MAAX recommends the installation of a floor drain outside the unit.

INTERIOR DIMENSIONS	36" L x 36" W x 76 5%" H
EXTERIOR DIMENSIONS	44 ¼" L x 38" W x 78 ¾" H
SKIRT HEIGHT	3/4"
THRESHOLD HEIGHT	1/2"
WEIGHT	162 LB
MATERIAL	ACRYLX
WARRANTY	RESIDENTIAL: LIMITED LIFETIME COMMERCIAL: 30 YEARS

(141412-R/L)



STANDARD FEATURES

- 1-piece transfer shower
- Reinforced according to Fair Housing Act accessibility requirements
- Center drain
- Textured bottom
- Available in standard and non-standard colors

COMPLIANT PACKAGE

Fully equipped - ADA compliant

Base model with complete ADA package

- 1 x Horizontal L-shaped 34 3/8" x 18" textured stainless steel grab bar
- L-Shaped fold-up Phenolic white seat
- Chrome pressure balance mixing valve with hand-held shower
- Chrome 24" slide bar & 60" flexible hose

ecify	

Specify colors
White Bone Biscuit
Non-standard color:
Options
36" Chrome curtain rod (factory-installed)
Chrome recessed soap dish (drilled, not installed)
Accessories (sold separately)
Solid Brass drain with Chrome plated stainless steel grid

36" White vinyl shower curtain with stainless steel hooks

ADA STANDARDS FOR ACCESSIBLE DESIGN


FHA. CSA B45.5-11 / IAPMO Z124-2011. HUD UM 73a. ASTM F-462


ADA COMPLIANT


TO COMPLETE YOUR ORDER, THIS DOCUMENT MUST BE SIGNED AND FAXED TO AKER ORDER DESK FAX: (304) 263-8369 • PHONE: 1-800-962-2537


TECHNICAL DRAWINGS

Left side shown Right side symmetrical











DAM PROFILE

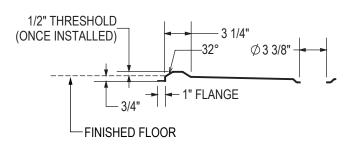

FRAMING DIMENSIONS



Model	А	В	С	D	Е
141412	38 ¾	36	36	19 ½	19 %

MINIMUM CLEARANCE

SHOWER 36" X 36"	
ADA	
F	48"
G	36"

Clearance zone from the control wall and adjacent to the open face.