

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$
Jets	50
1 heated backrest & headrest	Included
MiaMulti® Control*	Included
Geysair®	Included
AromaCloud® BAROMAC	\$

BESSOD00T-XX

BESSOD00N-XX

TUB Soaker	\$
AromaCloud® BAROMAC	\$
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control	Included with therapy

Illuzio Chromatherapy BCHRO6

FEATURES				
Installation type		Drop-In		
No. of bathers	•	Inverted V		1
US gallons	61	Armrests		2
Imp. gallons	51	Grab bars (color match)		2
Raised seats	1	Footrest		Included
WASTE & OVERFLOW 16" x 35" BOVER16I-XX				
White 01, Biscuit 02, Chrome 07, Brushed Nickel 09, Polished Nickel 10, Oil-rubbed Bronze 11		Installed & Included		
STANDARD COLOR				
White 01 Biscuit 02				Included

OPTIONS (UPCHARGE APPLICABLE)	
FINISH	
UltraVelour Matte Finish (White only) BVEL	\$
CLEAR ACRYLIC GRAB BARS BGBG10-XX	
With Chrome 07 or Brushed Nickel 09 inserts	\$
IF REQUIRED BY CONSTRUCTION CODE OR INSTALLED	WITH ITD
16" x 35" Cable driven Brass waste & overflow kit BOVERBR-XX	\$


* For TMU, control and faucets cannot be installed ont the deck of the bath.

TOTAL PRICE










ESSENCIA OVAL 7236

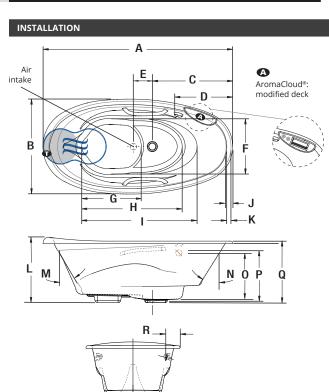

LETTER	DESCRIPTION	MEASURE
Α	Total length	72"
В	Total width	36"
С	Outside edge to center drain	30 1/2"
D	Outside edge to overflow	20 1/2"
E	Distance from center air intake to center drain	5"
F	Bathing well width	21"
G	Raised seat length	22 5/8"
н	Bottom bathing well length	38"
I	Bathing well length	45 1/4"
J	Deck width (top)	2 5/8"
K	Deck width (raised deck)	1 1/2"
L	Total height to headrest	24 7/8"
М	Slope of backrest	30°
N	Slope on waste side	32°
0	Maximum water level	16 5/8"
P	Height from drain to center of overflow	18 3/8"
Q	Height from bottom of tub to top deck	23 1/2"
R	Minimum faucet dimension	6 3/8"

- ⚠ AromaCloud® position
- Indicates heated backrest (TMU)
- Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS				
Hot water	Should be 70% of water capacity of TUB or greater.	Cutting template	# 90000056	
supply required Should be 70% of Water capacity of 10B of gre		Approx. shipping weight	146 lbs	
Turbine dedicated line with a Ground-Fault Circuit Inter a second line is needed 15 A. 120 V, 60 hz, de	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option,	Turbine power	550 W	
	a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.	Air heater	600 W	
	- Faucets cannot be installed on the deck of the bath The turbine must be remotely installed.	WARRANTY		
Others		Controls-LED-Geysair*	5 years	
		Bath & turbine*	20 years	
	st be installed by certified professionals only and according to our Owner's Manual as well as federal, and local building codes and regulations (www.bainultra.com/documentation/documentation).	* Some restrictions apply www.bainu	tra.com/warranty	





The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.