



- Certified to meet CSA B45.5/IAPMO Z124 Standard.
- Product has a Class B fire rating as determined by ASTM E-84 test method.

 $\lceil [89\text{mm}] [394\text{mm}]$ 

- When installing this whirlpool, an access area should be provided near the location of the whirlpool pump for future access. An access area is required by many local, state & federal building codes.
- Recommended access area dimensions: W-20" [508mm] H-15" [381mm]
- Reinforced & slip resistant floor.

PRODUCT SPECIFICATIONS:

- Sufficient drain clearance to accommodate above the floor plumbing.
- Integral 1" [25mm] nailing flange.
- Spacious bathing well with molded arm rests.
- Simulated tile walls with molded shelving.
  - Door Opening: W-56" [1422mm]

H-56 1/2" [1435mm]


\* Bathwell Dimensions (At top):W-55 1/4"[1403mm]

D-32 1/4"[819mm]

H-13 1/2"[343mm]

\* Bathwell Dimensions (At Bottom):W-46"[1168mm] D-20"[508mm]

- Bathwell Capacity (At Overflow): 48 Gal. [182L]
- Water Level (At Overflow): 10"[254mm]
- All dimensions +/- 1/2" [12.8mm]
- \* Clarion Bathware reserves the right to change design and/or dimensions.
- \* Dimensions are the same for RE, MP, and all other versions of this model.

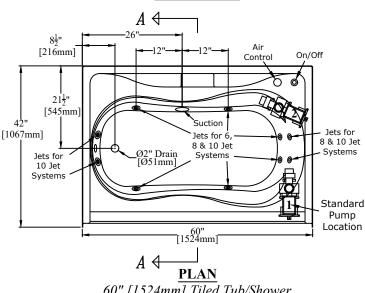

60" [1524mm] Tiled Tub/Shower w/ Molded Shelving & 6, 8, or 10 Jet Whirlpool Package

Left Hand Version (RE8042LX:6, RE8042LX:8, or RE8040LX:A) Shown

## RE8042LX:6, RE8042LX:8, RE8042LX:A, RE8042RX:6, RE8042RX:8, or RE8042RX:A

60" [1524mm] Tiled Tub/Shower w/ Molded Shelving & 6, 8, or 10 Jet Whirlpool Package

Clarion
BATHWARE
44 Amsler Ave.
Shippenville, PA 16254

Phone: (814) 226-5374 Toll Free: (800) 576-9228 Fax: (814) 226-0730

www.clarionbathware.com

Signatures For Approval: Date: Dwg.# RE8042LX or RX Customer: -6,8&10 JETCUT Arch./Engr: Ouote #: Dwg. By: CAL Job Name: DATE: 5/11/2021

\*\*\* IMPORTANT NOTICE \*\*\*