
## PRODUCT SPECIFICATION DRAWING HOLDRITE® #V-2

## Supports copper water piping off the building's structure or other piping

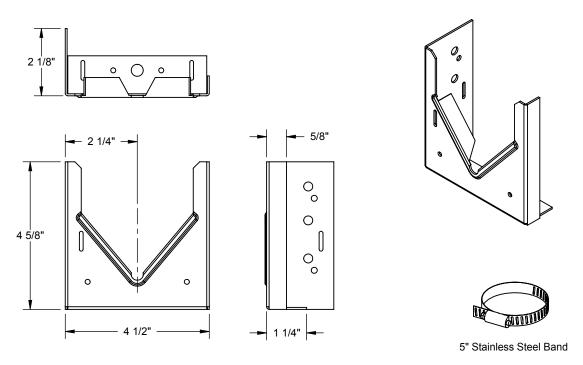

**ALL DIMENSIONS IN INCHES** 

The HOLDRITE® #V-2 is a Copper-Bonded™ steel bracket designed to saddle horizontal water headers, with a load rating of 250 pounds, in tubing sizes ranging from 1/2" through 3". The #V-2 comes pre-assembled with isolating felt and a 5" self-locking stainless steel band attached. Ideal for pre-fab installations. Simply attach the #V-2 to adjacent surface or piping and position the horizontal water header. Solder the tubing to the #V-2 bracket. Heat the pipe, not the bracket.

CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONS<sup>SM</sup> 800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM spec\_V2\_RevF

## **Product Information:**

Material: 16 gage CRS, Copper-Bonded™

WRIT

UPC / IPC / IAPMO listed



	Product Submittal
	Job Name:
	Date:
	Part Number: Qty:
INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE OUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT TEN AUTHORIZATION.	Architect / Owner:
	Contractor: Notes: