

## SUBMITTAL SHEET

JOB NAME		ITEM TAG
JOB LOCATION		PART NUMBER
CONTRACTOR	DATE	
ENGINEER APPROVAL	DATE	



## LEAD-FREE FLARE X FLARE COUPLINGS

### T-4200NL

Designed and manufactured for underground water service installations only.

Available in NPT nominal sizes 3/4" through 2".

#### Working Pressure, Non Shock (PSI)

3/4" - 1" - 100 psi up to 100° F

1-1/4" - 2" - 80 psi up to 100° F




**Pictured:**  
T-4200NL

#### MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATION
1 Body	Bronze	ASTM B-62 UNS C83600/C89836
2 Flare nut	Bronze	ASTM B-62 UNS C83600

#### DIMENSIONS

Size	A	B	C	D	Item No.
3/4"	0.66	4.43	1.54	0.90	313-104NL
1"	0.85	5.24	1.83	1.16	313-105NL
1-1/4"	0.99	5.88	2.39	1.41	313-106NL
1-1/2"	1.09	6.54	2.91	1.70	313-107NL
2"	1.26	8.25	3.58	2.19	313-108NL

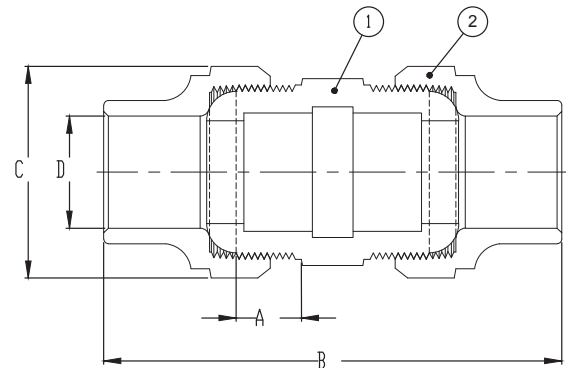

**Pictured:**  
T-4200NL  
Cut-away

#### Certifications/Listings:

Third-party certified.

ANSI/NSF 61: Drinking water system components health effects.

ANSI/NSF 372: Drinking water system components-lead content.

#### Standards:

AWWA C800: Underground service line valves and fittings.