

5-Hole Deck Mount Tub Filler

FEATURES:

- Metal construction
- Lever handles
- 1/4 turn ceramic cartridges
- Flow Rate of 5.8 gpm (22.0 l/min) at 45 psi
- 5-hole installation
- Water supply lines not included
- Corrosion resistant finishes
- Coordinates with Vector Collection

HAND SHOWER FEATURES:

- ½" NPSM male inlet
- Max flow rate 1.5 gpm (5.7 L/min)
- Includes 60" finish matched hose

STOCK FINISHES:



PC MB

STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- WaterSense certified (hand shower only)

WARRANTY:

Visit www.speakman.com for full product warranty information

- 5 Year Limited Warranty (commercial)
- Limited Lifetime Warranty (residential)




Information continues on next page

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 01-MARCH 2020

5-Hole Deck Mount Tub Filler

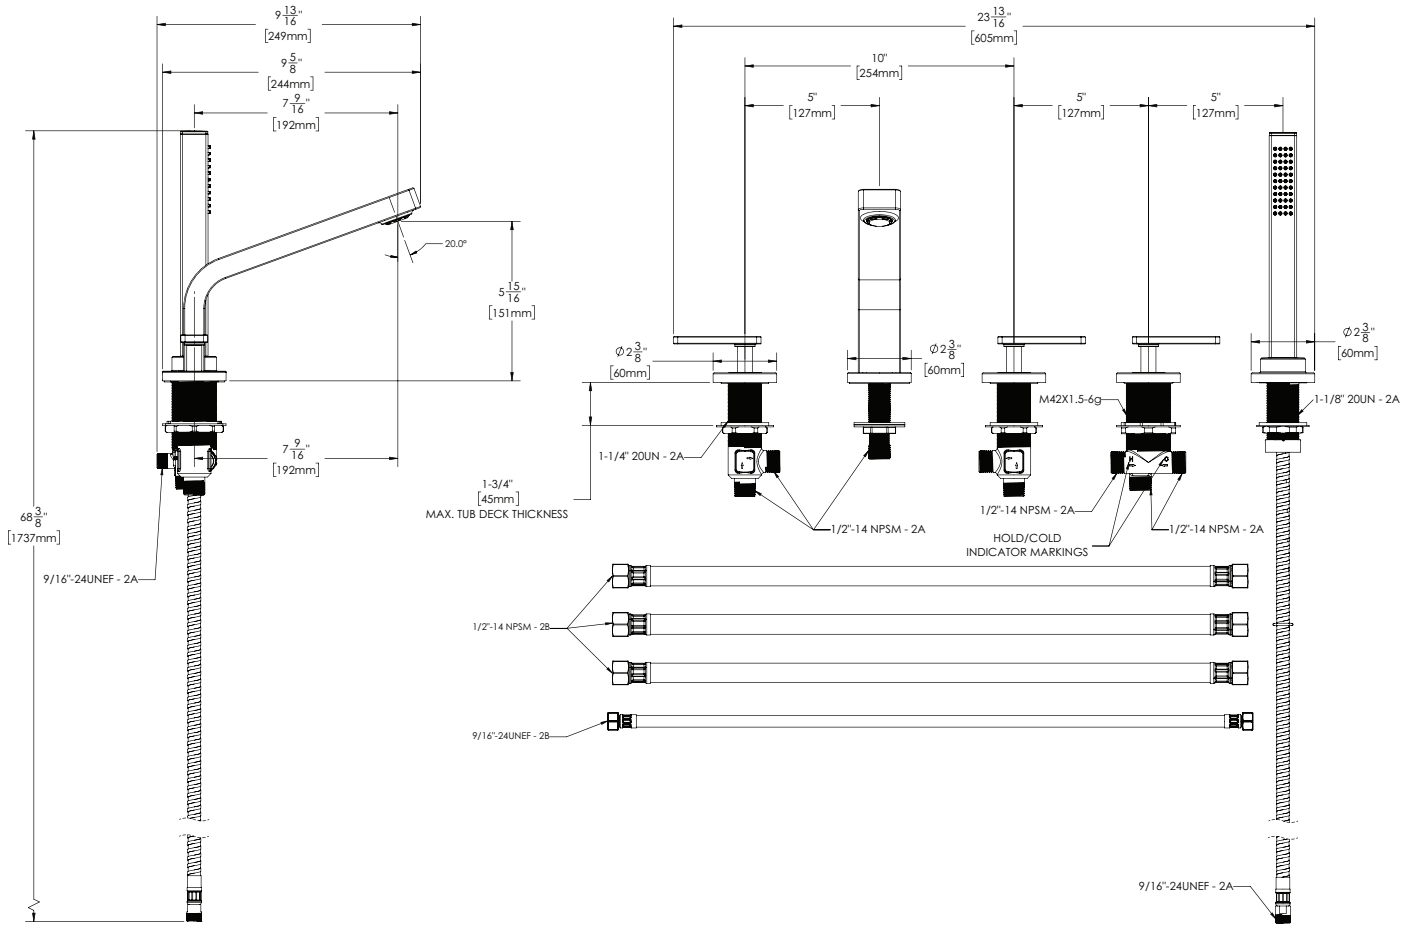

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space: