


4-451-TRM


Symmons® Push-button Diverter Trim

Operation & Maintenance Manual



| Model Number | | Specifications |
|----------------------------|---------------------------|---|
| ☐ 4-451-TRM | Push-button Diverter Trim | Push-button diverter trim includes escutcheon, knob and dial made from metal and plastic materials plated in standard polished chrome finish. |
| Compliance | | Warranty |
| -ASME A112.18.1/CSA B125.1 | | Limited Lifetime - to the original end purchaser in consumer installations. 5 Years - for commercial installations. |
| | C | Refer to www.symmons.com/warranty for complete warranty information. |


Dimensions



| Measurements | | | |
|--------------|-----------------|--|--|
| Α | Ø 2 3/4", 70 mm | | |
| В | 1 3/8", 35 mm | | |
| С | 3 1/4", 83 mm | | |

Note: Dimensions are subject to change without notice.

Parts Breakdown

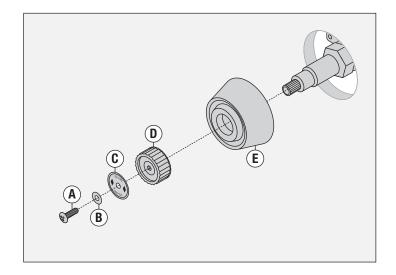

| Replacement Parts | | | | |
|-------------------|-------------|-------------|--|--|
| Item | Description | Part Number | | |
| E | Escutcheon | LD-15A | | |
| Α | Screw | | | |
| В | Washer | DT-13/15 | | |
| C | Dial | DI-13/15 | | |
| D | Knob | | | |

| Required for Installation | | | |
|---------------------------|--|--|--|
| Phillips head screwdriver | | | |



4-451-TRM


Symmons® Push-button Diverter Trim

Operation & Maintenance Manual

Installation


Note: For rough-in installation, please see valve body installation guide.

1) Install escutcheon (E), knob (D), dial (C) and secure with washer (B) and one screw (A).




Diverter Control

1) Diverter knob out is for tub spout operation.




2) Push diverter knob in for shower operation.



Volume Control

1) Turn diverter knob to control water volume.



Care and Cleaning

1) Clean finished trim area with a soft cloth using mild soap and water or a non-abrasive cleaner and then quickly rinse with water.