





Location:



532HS  
Museo™ Hand Shower Assembly  
Specification Submittal

<b>Model Number</b>	<b>Specification</b>
<input type="checkbox"/> <b>532HS</b> Museo™ Hand Shower Assembly	2 mode hand shower assembly includes in-line vacuum breaker, wall connection, cradle for hand shower mounting, flexible metal hose and 2.5 gpm (9.5 L/min) flow restrictor. Components made from metal and plastic materials plated in standard polished chrome finish.
<b>Modifications</b>	<b>Compliance</b>
<input type="checkbox"/> <b>-1.5</b>  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> <b>-2.0</b>  2.0 gpm (7.6 L/min) flow restrictor <input type="checkbox"/> <b>-BLK</b> Polished graphite finish <input type="checkbox"/> <b>-STN</b> Satin nickel finish	- ASME A112.18.1/CSA B125.1  <b>Warranty</b> <b>Limited Lifetime</b> - to the original end purchaser in consumer installations. <b>5 Years</b> - for commercial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.

**Dimensions**

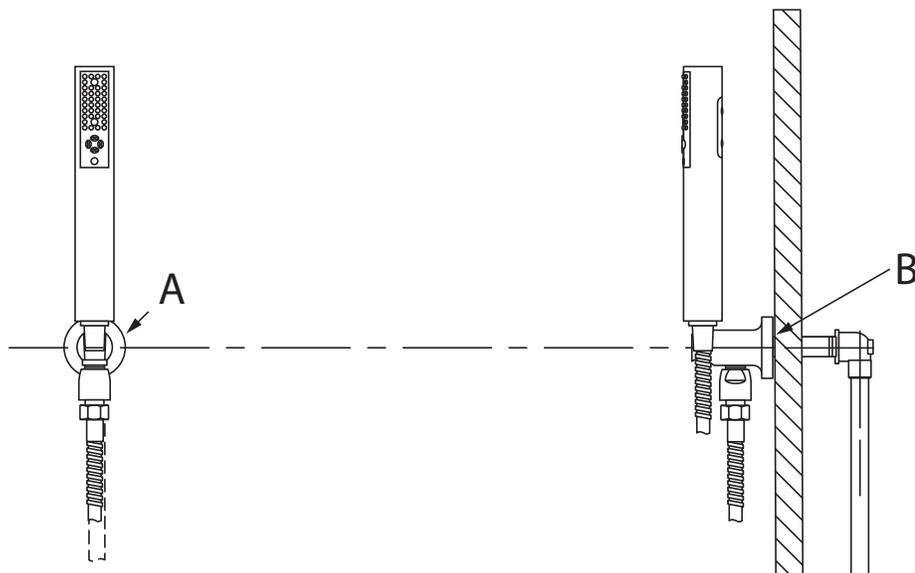

Measurements	
A	Ø 2", 51 mm
B	1/2" IPS thread must be recessed 1/4" from finished wall

**Note:** Dimensions are subject to change without notice.