




Models 266, 267 Series

SEWAGE/EFFLUENT OR DEWATERING PUMP MATERIAL SPECIFICATIONS:

- 1/2 HP, 220V, 1 Ph, 50 Hz.
- Non-Clogging Vortex Impeller design.
- Passes 51 mm spherical solids.
- 2" NPT female vertical discharge.
- Automatic reset thermal overload protection.
- Float operated 2-pole mechanical switch available.
- Durable cast iron construction with corrosion resistant powder coated epoxy finish.
- Stainless steel screws, bolts, float rod, handle, guard and switch arm assembly.
- Automatic or Nonautomatic.

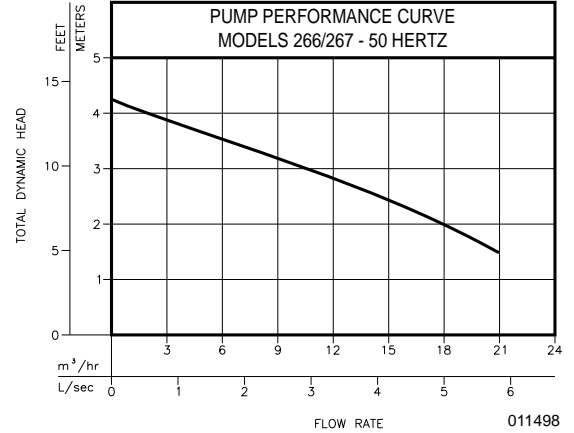

Model	Volts	Ph	Mode	Input kw	Amp
U266	220	1	Auto	0.7	4.4
V266	220	1	Nonauto	0.7	4.4
U267	220	1	Auto	0.7	4.4
V267	220	1	Nonauto	0.7	4.4

All models completely submersible and hermetically sealed.

"QUALITY PUMPS SINCE 1939"

Models 282, 292, 293, 294 High Head Series

SEWAGE OR DEWATERING PUMP MATERIAL SPECIFICATIONS:

- Non-Clogging Vortex Impeller design.
- Passes 51 mm spherical solids.
- Specify 2" or 3" flanged discharge.
- Automatic reset thermal overload protection (1 Ph models only).
- Float operated 2-pole mechanical switch available. Single seal & single phase only.
- Corrosion resistant powder coated epoxy finish.
- Stainless steel screws, bolts, float rod, handle, guard and switch arm assembly.
- Durable cast iron construction.
- Automatic or Nonautomatic.



Model	Volts	Ph	Mode	Input kw	Amp
U282	220	1	Auto	1.0	5.7
V282	220	1	Nonauto	1.0	5.7
AK282	380	3	Nonauto	1.0	1.3
AA292	110	1	Auto	1.5	15.0
AB292	110	1	Nonauto	1.5	15.0
U292	220	1	Auto	1.5	6.6
V292	220	1	Nonauto	1.5	6.6
AK292	380	3	Nonauto	1.6	1.6
U293	220	1	Auto	1.8	8.2
V293	220	1	Nonauto	1.8	8.2
AK293	380	3	Nonauto	1.8	3.1
U294	220	1	Auto	2.8	14.3
V294	220	1	Nonauto	2.8	14.3
AK294	380	3	Nonauto	2.5	3.8

