# **KOHLER**<sub>®</sub>

One-piece elongated toilet with skirted trapway, 1.28 gpf K-46006

### Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl
- Comfort Height<sup>®</sup> feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- 12" x 9-1/2" (305 mm x 241 mm) water surface
- Concealed trapway facilitates easy cleaning and enhances design

### Installation

- Floor-mount
- Standard 12" (305 mm) rough-in

### **Recommended Products/Accessories**

K-46035 Remote actuator





Codes/Standards ASME A112.19.2/CSA B45.1

DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) IAPMO Certification

### KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

Color Code Description


0 White



## Avoir®



Avoir® One-piece elongated toilet with skirted trapway, 1.28 gpf K-46006

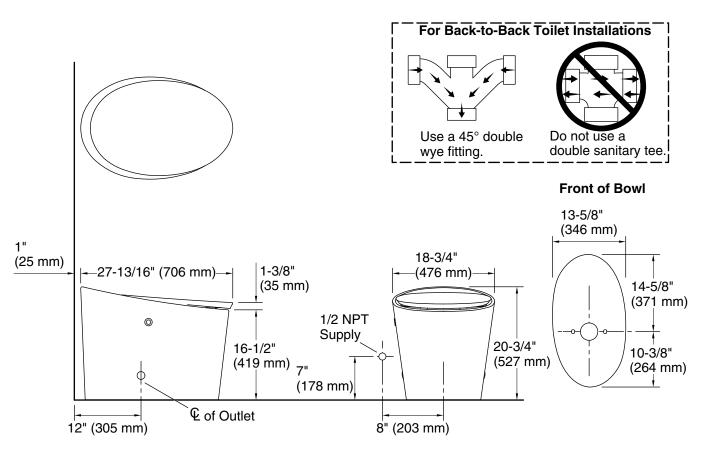

### **Technical Information**

#### All product dimensions are nominal. Toilet type: Floor-mount Waste Outlet: Floor Bowl shape: Elongated Flush type: Pressure Lite Trap passageway: 1-15/16" (49 mm) Water surface size: 11-1/2" x 10-3/16" (293 mm x 258 mm) Rim to water 5-1/4" (134 mm) surface: Rough-in: 12" (305 mm)

### **Fixture Supply Requirements**

Min static pressure:	50 psi (344.7 kPa)
Max static pressure:	80 psi (551.6 kPa)
Min flow rate:	6.5 gpm (24.6 lpm)

### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

