

A CSW Industrials Company



Mini Lime Univolt

Project Information:

Mini-Split Condensate Pump Kit 100–250v 83849 (ASP-ML-UNI)

| · · · · · · · · · · · · · · · · · · · | | | | | |
|---------------------------------------|-------------------------|--|--|--|--|
| Job Name: | | | | | |
| Location: | | | | | |
| Engineer: Submitted to: | | | | | |
| | | | | | |
| Submitted by: | | | | | |
| | | | | | |
| Reference: | | | | | |
| Submittal Informat | ion: | | | | |
| Approval: | | | | | |
| Date: | | | | | |
| Construction: | | | | | |
| Unit #: | | | | | |
| Drawing #: | | | | | |
| (Sec. I) Product Specifi | ications: | | | | |
| Pump Length | 3.75" | | | | |
| Pump Width | 1.625" | | | | |
| Pump Height | 3.125" | | | | |
| Capacity | 2.9-3.2 GPH @ 0' Head / | | | | |
| | 1.3-1.5 GPH @ 33' Head | | | | |
| Max BTUs | 54,600 | | | | |
| Max Head in Feet | 33 | | | | |
| Max Temperature | 104°F | | | | |
| Max Suction Lift | N/A | | | | |
| Sound Level | 25.5dB(A) | | | | |
| Dry Contact Rating | 3A NC | | | | |
| Voltage | 100-250v | | | | |
| Amperes | .16 | | | | |
| Watts | 16 | | | | |
| Remote Reservoir | N | | | | |
| Plenum Rated | N | | | | |
| Cable Length | 6' | | | | |

Sound level and pump performance varies with voltage frequency.

Pump Selector & Wiring Diagrams Available at

http://www.rectorseal.com/aspenpump.html

(Sec. II) Ordering Information:

Product Code 83838 Model ASPMLUNI Carton Qty 1

Carton Uty 1 Carton Weight 3.8


(Sec. III) Carton Contents:

Monobloc Pump Assembly 31" Lineset Cover 5'x1/4" i.d. Vinyl Discharge Tube Cable Ties (6) 6"x1/4" i.d. Vinyl Breather Tube Wall Plugs & Screws 20"x5/8" i.d. Inlet Tube Ceiling Plate Inline Fuse Installation Manual Drain Hose Adaptor Anti-Siphon (1) Lineset Cover Elbow 90° Elbow

(Fig. I) Product Image:



(Fig. II) Typical Pump Locations:

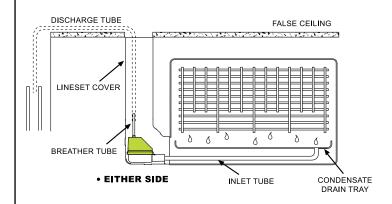

(RectorSeal's products are subject to continuous improvements; RectorSeal reserves the right to modify product design, specifications & information in this data sheet without notice and without incurring any obligations)

ASPEN® is a registered trademark of Aspen Oldco Limited Company UK



A CSW Industrials Company


Mini Lime Univolt

Mini-Split Condensate Pump Kit 100–250v 83849 (ASP-ML-UNI)



Aspen Pump BTU Calculator

| Mini Lime 115v 60Hz | | | |
|---------------------|-----|-------|--|
| Head | GPH | BTU | |
| 0 | 3.2 | 54600 | |
| 5 | 2.9 | 49500 | |
| 10 | 2.6 | 44350 | |
| 15 | 2.4 | 42000 | |
| 20 | 2.2 | 37500 | |
| 25 | 2 | 34000 | |
| 30 | 1.6 | 27500 | |
| 33 | 1.5 | 25800 | |

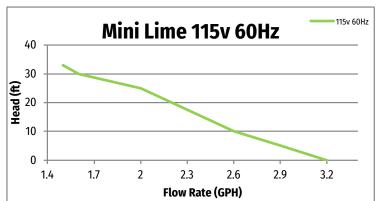

| Mini Lime 230v 60Hz | | | |
|---------------------|-----|-------|--|
| Head | GPH | BTU | |
| 0 | 2.9 | 49500 | |
| 5 | 2.5 | 42600 | |
| 10 | 2.2 | 37500 | |
| 15 | 2 | 34000 | |
| 20 | 1.8 | 30700 | |
| 25 | 1.6 | 27500 | |
| 30 | 1.4 | 23900 | |
| 33 | 1.3 | 22400 | |

